

# **PM82802C-28QW Datasheet**

## **280V,3-Phase Bridge Pre Driver**

**Version: Rev.1.0**

Release Date: 2025-07-09

PANJIT International Inc.

[www.panjit.com.tw](http://www.panjit.com.tw)

## General Description

PM82802C-28QW is a high-speed 3-phase gate driver for power MOSFET and IGBT devices with three independent high and low side referenced output channels. Built-in dead time protection and shoot-through protection prevent damage to the half-bridge. The UVLO circuits prevent malfunction when VCC and VBS are lower than the specified threshold voltage. A novel high-voltage BCD process and common-mode noise canceling technique provide stable operation of high-side drivers under high dV/dt noise conditions while achieving excellent negative transient voltage tolerance. Low-PW consumption is included so that standby mode may be used to set the chip into a low quiescent current state to realize long battery lifetime.

## Product Summary

<b>V<sub>OFFSET</sub></b>	<b>280V max</b>
<b>I<sub>o+/-</sub></b>	<b>1.0 A / 1.2A</b>
<b>VCC</b>	<b>5V to 20V</b>
<b>ton/off (typ.)</b>	<b>310 &amp; 120ns</b>
<b>Work Tem</b>	<b>-40 ~150 °C</b>

## Features

- ◆ Integrated DBOOT<sup>(1)</sup>
- ◆ Floating channel designed for bootstrap operation
- ◆ Fully operational to +280 V
- ◆ Tolerant to negative transient voltage
- ◆ Gate drive supply range from 5V to 20V
- ◆ Independent 3 half-bridge drivers
- ◆ Low side output out of phase with inputs. High side outputs out of phase
- ◆ 3.3V logic compatible
- ◆ Lower di/dt gate drive for better noise immunity

Note: (1)When using internal diode bootstrap power supply, please match the capacitor and MOS, and fully test and verif.

## Applications

- ◆ E-BIKE/electric power tool 3-phase motor driver
- ◆ Battery-powered mini/micro motor control
- ◆ General purpose inverter


## Ordering Information

ORDER NUMBER	Marking ID	Package	Description
PM82802C-28QW	A1 YM DNN	WQFN4x4-24	Halogen Free RoHS compliant in TB , 4000pcs


## Marking Information

Marking	Package	Definition
A1 YM DNN	WQFN4x4-24	Product code : A1 Y : Year code M : Month code D : Day code NN: Serial Number

## Typical Application

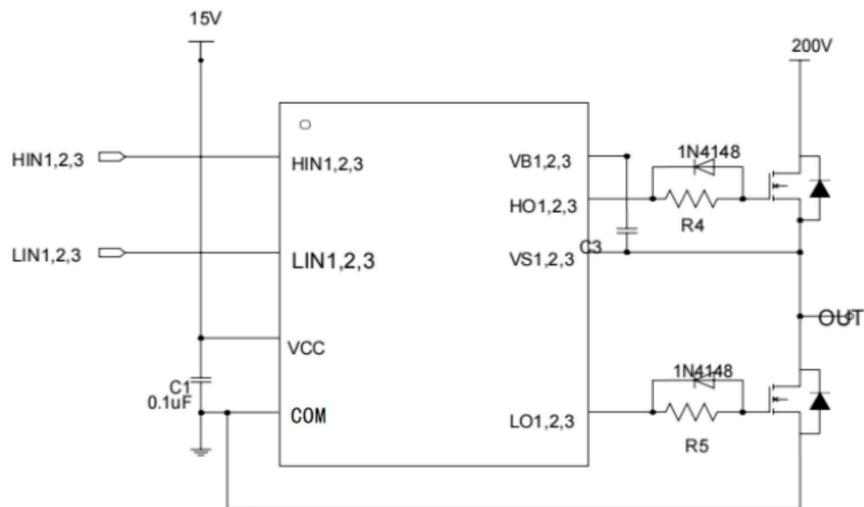

**NO-BOOT Application**

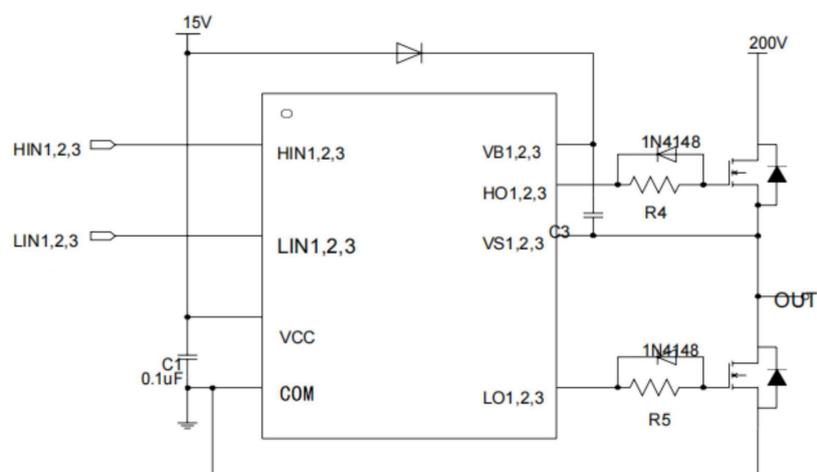


**BOOT Application**

**Pin Function**


Number	Symbol	Description
1	VCC	Low side and logic fixed supply
2	HIN1,2,3	Logic inputs for high side gate driver outputs(HO1,2,3),in phase
3	LIN1,2,3	Logic inputs for high side gate driver outputs(LO1,2,3),in phase
4	COM	Logic Ground
5	VB1,2,3	High side floating supply
6	HO1,2,3	High side gate driver outputs
7	VS1,2,3	High voltage floating supply returns
8	LO1,2,3	Low side gate driver output

**Packages**

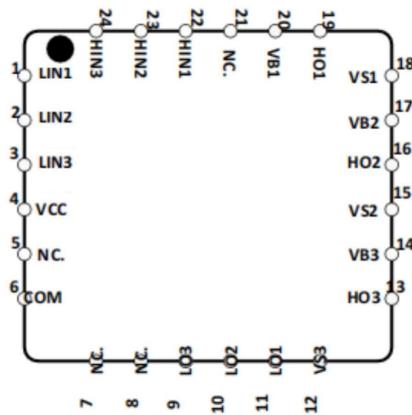

**WQFN4x4-24**

Function Block Diagram

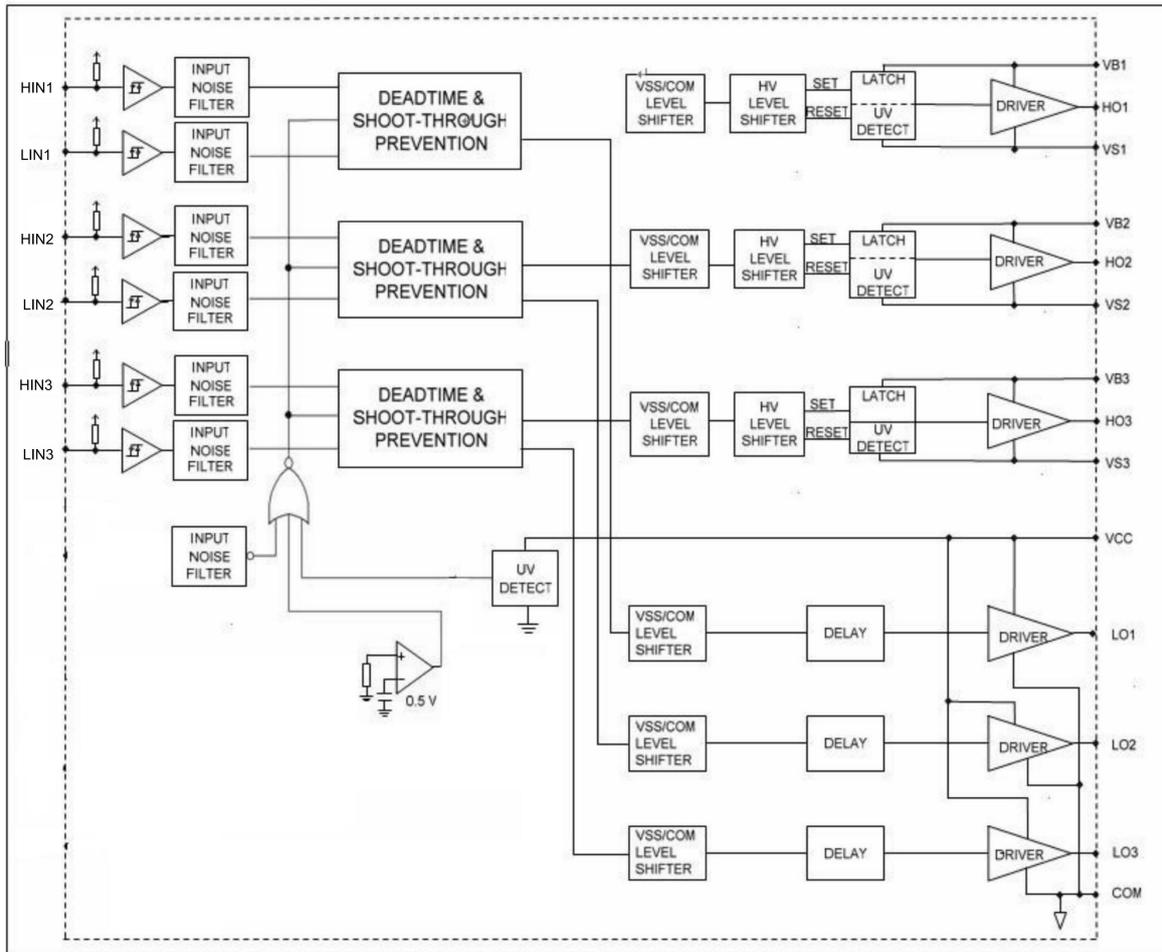

## Absolute Maximum Ratings

Absolute maximum ratings indicate sustained limits beyond which damage to the device may occur. All voltage parameters are absolute voltages referenced to COM. The thermal resistance and power dissipation ratings are measured under board mounted and still air conditions.

Symbol	Definition	Min	Max	Units
VS	High side offset voltage	VB 1,2,3-25	VB 1,2,3+ 0.3	V
VB	High side floating supply voltage	-0.3	280	
VHO	High side floating output voltage	VS1,2,3 -0.3	VB 1,2,3+ 0.3	
VCC	Low side and logic fixed supply voltage	-0.3	25	
VLO1,2,3	Low side output voltage	-0.3	VCC+0.3	
VIN	Logic input voltage (HIN&LIN)	-0.3	VCC+0.3	
dV/dt	Allowable offset voltage slew rate	-	50	V/ns
PD	Package power dissipation @ T <sub>A</sub> ≤+25 °C	-	3.0	W
RthJA	Thermal resistance, junction to ambient	-	40	°C/W
TJ	Junction temperature	-	150	°C
TS	Storage temperature	-55	150	
TL	Lead temperature (soldering, 10 seconds)	-	300	

## Recommended Operating Conditions

The Input/Output logic timing diagram is shown in figure . For proper operation the device should be used within the recommended conditions. All voltage parameters are absolute referenced to COM. The VS offset rating is tested with all supplies biased at 15V differential.

Symbol	Definition	Min	Max	Units
VB1,2,3	High side floating supply voltage	VS1,2,3+5	VS1,2,3+20	V
VS1,2,3	High side floating supply offset voltage	Note 1	200	
VHO1,2,3	High side output voltage	VS1,2,3	VB1,2,3	
VLO1,2,3	Low side output voltage	0	VCC	
VCC	Low side and logic fixed supply voltage	5	20	
VIN	Logic input voltage (HIN&LIN)	0	VCC	
TA	Ambient temperature	-40	125	°C

Note 1: Logic operational for VS of COM

## Electrical Characteristics

(V<sub>CC</sub>-COM)=(V<sub>B</sub>-V<sub>S</sub>)=15V. Ambient temperature T<sub>A</sub>=25°C unless otherwise specified. The V<sub>IN,TH</sub>, V<sub>I</sub>, and I<sub>IN</sub> parameters are referenced to COM and are applicable to all channels. The V<sub>O</sub> and I<sub>O</sub> parameters are referenced to COM and are applicable to the respective output leads. The V<sub>CCUV</sub> parameters are referenced to COM. The V<sub>BSUV</sub> parameters are referenced to V<sub>S</sub>.

Parameter	Symbol	Test Conditions	Min.	Typ.	Max.	Unit
<b>Low Side Power Supply Characteristics</b>						
Quiescent VCC supply current	I <sub>QVCC1</sub>	-	-	250	-	μA
operating VCC supply current	I <sub>VCCOP</sub>	f=20KHz	-	300	-	
VCC supply under-voltage positive going Threshold	V <sub>CCUV+</sub>	-	3.8	4.4	5	V
VCC supply under-voltage negative going threshold	V <sub>CCUV-</sub>	-	3.6	4.2	4.8	
VCC supply under-voltage lockout hysteresis	V <sub>CCHYS</sub>	-	0.1	0.2	-	
<b>High Side Floating Power Supply Characteristics</b>						
High side VBS supply under-voltage positive going threshold	V <sub>BSUV+</sub>	-	3.8	4.4	5	V
High side VBS supply under-voltage negative going threshold	V <sub>BSUV-</sub>	-	3.6	4.2	4.8	
High side VBS supply under-voltage lockout hysteresis <sup>6</sup>	V <sub>BSUVHYS</sub>	-	0.1	0.2	-	
High side quiescent VBS supply current	I <sub>QBS</sub>	V <sub>BS</sub> =15V	25	45	65	μA
operating VBS supply current	I <sub>BSOP</sub>	f=20KHz	-	160	-	
Offset supply leakage current	I <sub>LK</sub>	V <sub>B</sub> =V <sub>S</sub> =200V V <sub>CC</sub> =0V	-	-	10	
<b>Logic Input Section</b>						
Logic HIGH input voltage HIN1,2,3, LIN1,2,3	V <sub>IH</sub>	-	2.5	-	-	V
Logic LOW input voltage HIN1,2,3, LIN1,2,3	V <sub>IL</sub>	-	-	-	0.8	
Input positive going threshold	V <sub>IN,TH+</sub>	-	-	1.9	-	
Input negative going threshold	V <sub>IN,TH-</sub>	-	-	1.4	-	
Logic HIGH input bias current	I <sub>IN+</sub>	V <sub>IN</sub> =5V	-	25	-	μA
Logic LOW input bias current	I <sub>IN-</sub>	V <sub>IN</sub> =0	-	0	-	
<b>Gate Driver Output Section</b>						
High side output HIGH short-circuit pulse current	I <sub>HO+</sub>	V <sub>HO</sub> =V <sub>S</sub> =0	-	1.0	-	A
High side output LOW short-circuit pulse current	I <sub>HO-</sub>	V <sub>HO</sub> =V <sub>B</sub> =15V	-	1.2	-	
Low side output HIGH short-circuit pulse current	I <sub>LO+</sub>	V <sub>LO</sub> =0	-	1.0	-	
Low side output LOW short-circuit pulse current	I <sub>LO-</sub>	V <sub>LO</sub> =V <sub>CC</sub> =15V	-	1.2	-	
Allowable negative VS voltage for HIN1,2,3 signal propagation to HO1,2,3	V <sub>SN</sub>	V <sub>BS</sub> =15V	-	-12	-	V


## Electrical Characteristics

(V<sub>CC</sub> - COM)=(V<sub>B</sub> - V<sub>S</sub>)=15V ,VS1,2,3=COM, and Cload=1nF unless otherwise specified, ambient temperature T<sub>A</sub>=25° C.

Parameter	Symbol	Test Conditions	Min.	Typ.	Max.	Unit
Turn-on propagation delay	t <sub>on</sub>	V <sub>HIN1,2,3</sub> or V <sub>LIN1,2,3</sub> =5V, V <sub>S1,2,3</sub> =0	-	380	-	ns
Turn-off propagation delay	t <sub>off</sub>	V <sub>HIN1,2,3</sub> or V <sub>LIN1,2,3</sub> =0, V <sub>S1,2,3</sub> =0	-	180	-	
Turn-on rise time	t <sub>r</sub>	V <sub>HIN1,2,3</sub> or V <sub>LIN1,2,3</sub> =5V, V <sub>S1,2,3</sub> =0	-	50	-	
Turn-off fall time	t <sub>f</sub>	V <sub>HIN1,2,3</sub> or V <sub>LIN1,2,3</sub> =0, V <sub>S1,2,3</sub> =0	-	25	-	
Dead time	DT	V <sub>HIN1,2,3</sub> or V <sub>LIN1,2,3</sub> =0 and 5V, without external dead time	-	200	250	
Dead time matching (all six channels)	MDT	without external dead time	-	-	50	
Delay matching (all six channels)	MT	external dead time > 1000ns	-	-	50	
Output pulse-width matching	PM	external dead time > 1000ns, PW <sub>IN</sub> =10μs, PM=PW <sub>OUT</sub> -PW <sub>IN</sub>	-	-	50	

## Low Side Power Supply: VCC


VCC is the low side supply and it provides power to both input logic and low side output power stage. The built-in under-voltage lockout circuit enables the device to operate at sufficient power when a typical VCC supply voltage higher than  $V_{CCUV+}$  is present, shown as Figure. 1. The PM82802C-28QW shuts down all the gate driver outputs, when the VCC supply voltage is below  $V_{CCUV-}$ , shown as Figure. 1. This prevents the external power devices against extremely low gate voltage levels during on-state which may result in excessive power dissipation.

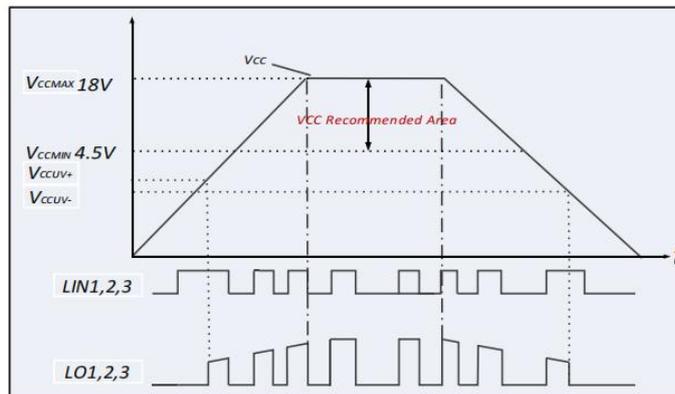

**Figure. 1 VCC supply UVLO operating area**

## High Side Power Supply: VBS (VB1-VS1, VB2-VS2, VB3-VS3)

VBS is the high side supply voltage. The total high side circuitry may float with respect to COM following the external high side power device emitter/source voltage. Due to the internal low power consumption, the entire high side circuitry may be supplied by bootstrap topology connected to VCC, and it may be powered with small bootstrap capacitors. The device operating area as a function of the supply voltage is given in Figure. 2.

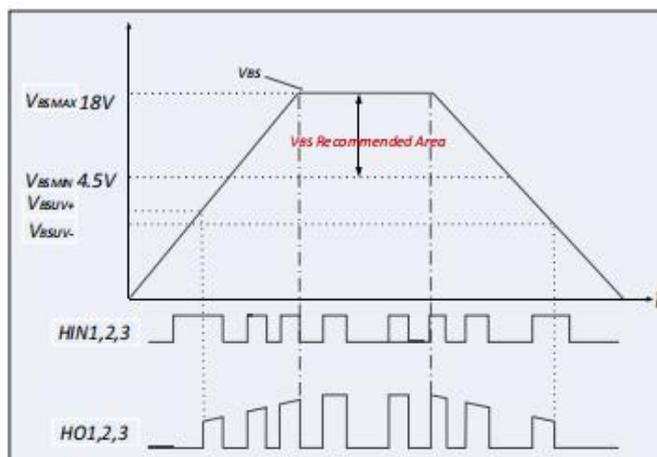


**Figure. 2 VBS supply UVLO operating area**

## Low side And High Control Input Logic: HIN&LIN (HIN1, 2, 3/LIN1, 2, 3)

The Schmitt trigger threshold of each input is designed low enough to guarantee LSTTL and CMOS compatibility down to 3.3V controller outputs. Input Schmitt trigger and advanced noise filtering provide noise rejection of short input pulses. An internal pull-down resistor of about 220kΩ(positive logic) pre-biases each input during VCC supply start-up state. The minimum recommended input pulse-width is 300ns for proper operation of the driver.

## Shoot- Through Prevention


The PM82802C-28QW is equipped with shoot-through protection circuitry (also known as cross conduction prevention circuitry). Figure. 3 shows how this protection circuitry prevents both the high- and low-side switches from conducting at the same time. When the inputs controlling both high-side and low-side drivers are both logic HIGH, then both driver outputs are pulled down to logic LOW to shut down two power devices in the same bridge.

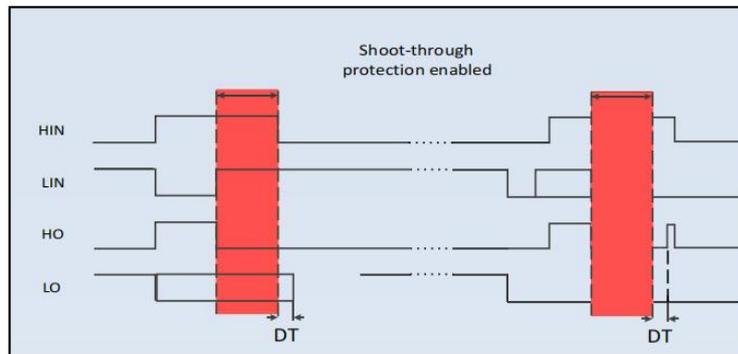

**Figure. 3 Shoot-through prevention**

## Dead Time Protection

The PM82802C-28QW features integrated fixed dead time protection circuitry. The dead time feature inserts a time period (a minimum dead time) in which both the high- and low-side power switches are held off. This is done to ensure that the power switch has fully turned off before the second power switch is turned on. This minimum dead time is automatically inserted whenever the external dead time is shorter than DT. External dead times larger than DT are not modified by the gate driver. Figure. 4 illustrates the dead time period and the relationship between the output gate signals.

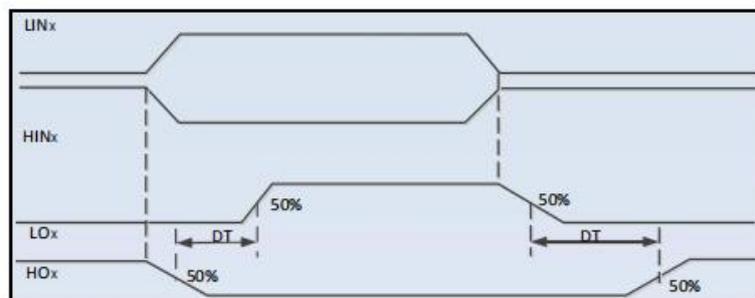


**Figure. 4 Dead time protection**


## Gate Driver (HO1, 2, 3/ LO1, 2, 3)

Low side and high side driver outputs are specifically designed for pulse operation and dedicated to drive power devices such as IGBT and power MOSFET. Low side outputs (i.e. LO1, 2, 3) are state triggered by the respective inputs, while high side outputs (i.e. HO1,2,3) are only changed at the edge of the respective inputs. After releasing from an under- voltage condition of the VBS supply, a new turn-on signal (edge) is necessary to activate the respective high side output. In contrast, after releasing from an under-voltage condition of the VCC supply, the low side outputs may directly switch to the state of their respective inputs without the additional constraints of the high side driver.


## Typical Performance Characteristics

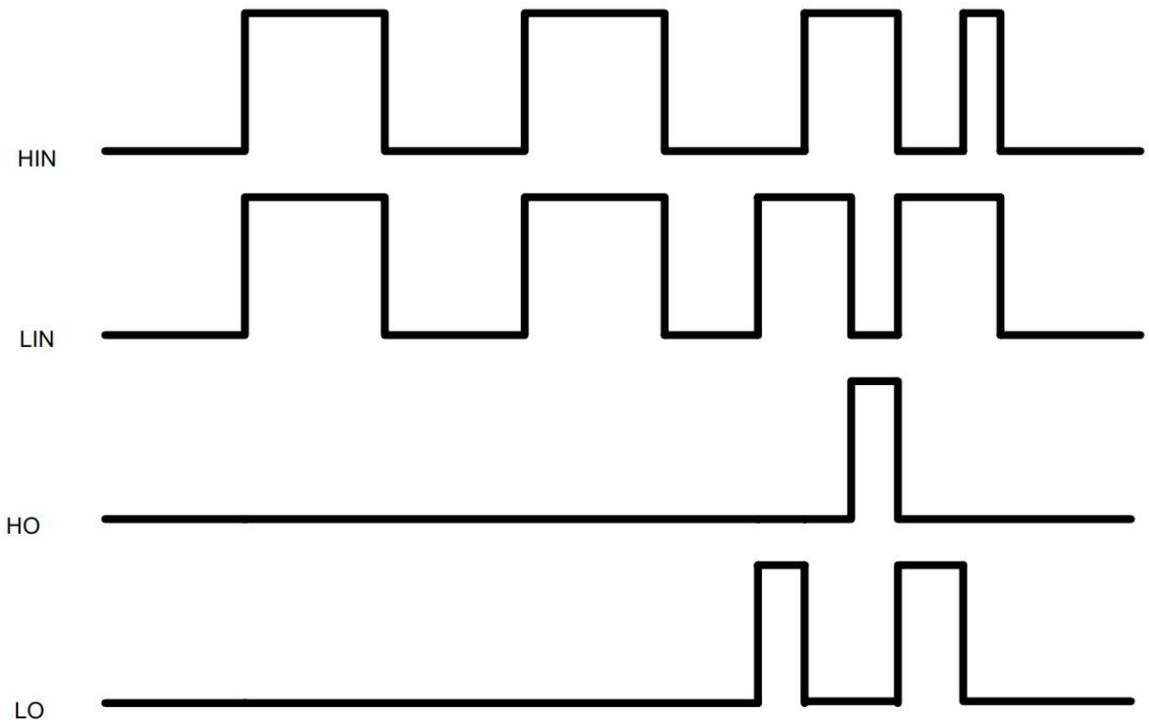


Time Waveform

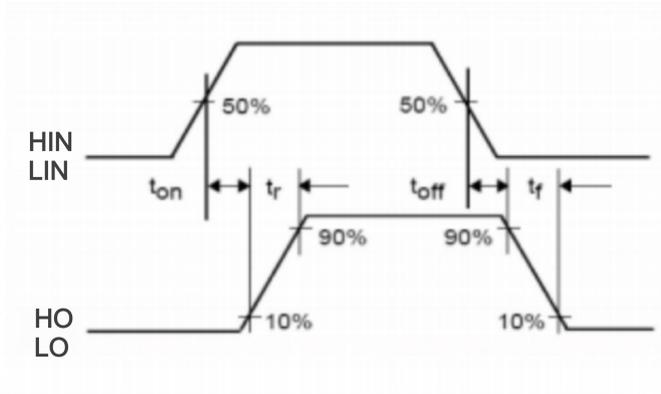

Switching Time Waveform Definitions

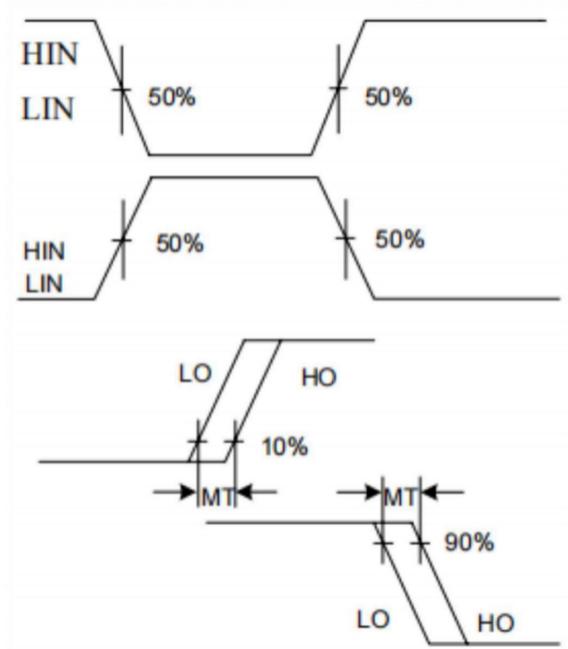


Deadtime Waveform Definitions

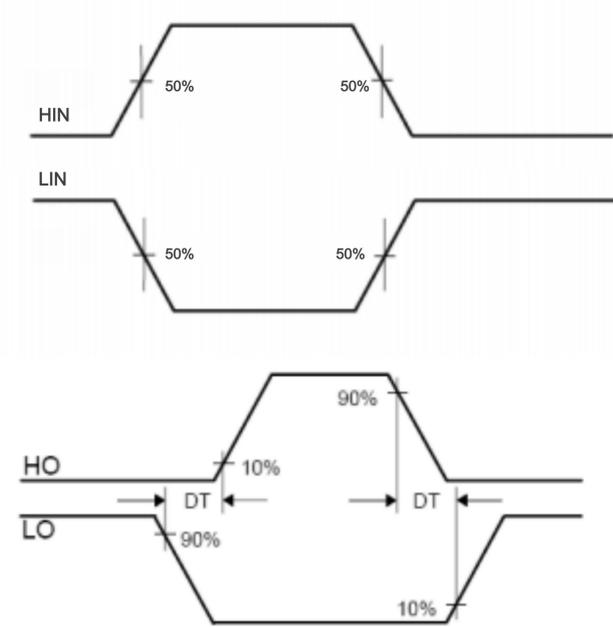

Delay matching time Definition

## Physical Dimensions

Unit:mm

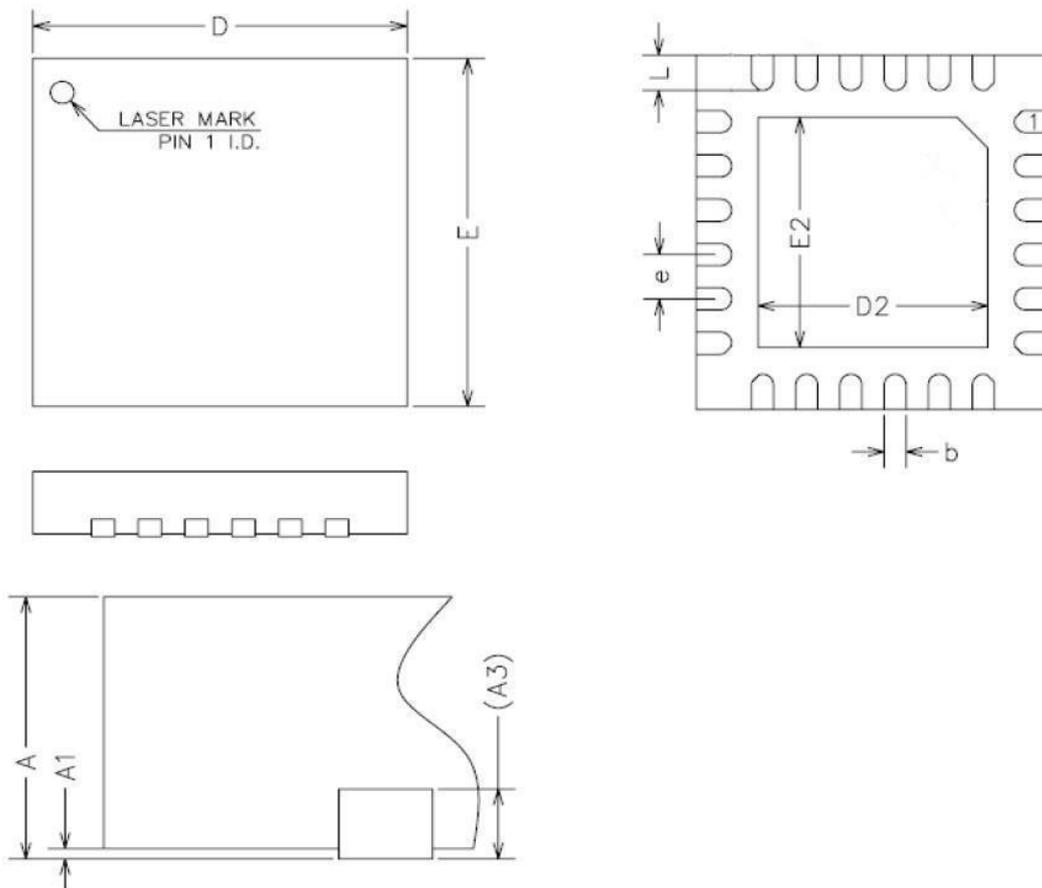

Symbol	Dimensions(mm)		
	Min.	Nom.	Max.
A	0.70	0.75	0.80
A1	0.00	0.02	0.05
A3	0.20 REF		
b	0.18	0.25	0.30
D	4.00 BSC		
D2	2.50	2.65	2.80
E	4.00 BSC		
E2	2.50	2.65	2.80
e	0.50 BSC		
L	0.35	0.40	0.45

Notes:

1. All dimensions refer to JEDEC MO-220 WGGD-6
2. All dimensions are in mm

## Disclaimer

- Reproducing and modifying information of the document is prohibited without permission from Panjit International Inc..
- Panjit International Inc. reserves the rights to make changes of the content herein the document follow PCN procedure. Please refer to our website for the latest document.
- Panjit International Inc. disclaims any and all liability arising out of the application or use of any product including damages incidentally and consequentially occurred.
- Panjit International Inc. does not assume any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.
- Applications shown on the herein document are examples of standard use and operation. Customers are responsible in comprehending the suitable use in particular applications. Panjit International Inc. makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.
- The products shown herein are not designed and authorized for equipments requiring high level of reliability or relating to human life and for any applications concerning life-saving or life-sustaining, such as medical instruments, transportation equipment, aerospace machinery et cetera. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Panjit International Inc. for any damages resulting from such improper use or sale.
- Since Panjit International Inc. uses lot number as the tracking base, please provide the lot number for tracking when complaining.

**Copyright© PANJIT International Inc.**

**Website: [www.panjit.com.tw](http://www.panjit.com.tw)**